

Caxtool Kft.
6791 Szeged, Dorozsmai út 157. EU
+36 62 254 826
+36 30 565 1812
d.zanocz@caxtool.hu
info@caxtool.hu


Adószám: 12871856-2-06
Adószám: HU 12871856
Bankszámla száma: 57600101-11102986
SWIFT (BIC): TAKBHUHB
IBAN: HU65 57600101 11102986 00000000
cégjegyzékszám: 06-09-014002
info:

Képgyűjtemény

Fiber lézervágó berendezés

CAXTC_Accurl_3015E_2kW_IP_1.0 fiber lézervágó berendezés / Fiber cutting machine



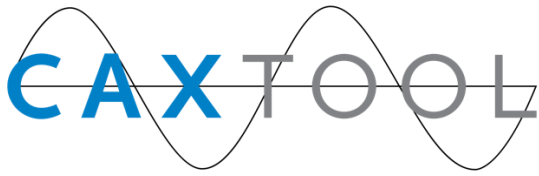

Caxtool Kft.
6791 Szeged, Dorozsmai út 157. EU
+36 62 254 826
+36 30 565 1812
d.zanocz@caxtool.hu
info@caxtool.hu

Adószám: 12871856-2-06
Adószám: HU 12871856
Bankszámla száma: 57600101-11102986
SWIFT (BIC): TAKBHUHB
IBAN: HU65 57600101 11102986 00000000
cégjegyzékszám: 06-09-014002
info:

FULLY ANNEALED FRAME

Accurl steel frames under go annealing at over 600° to relieve stress. They are built to last years of heavy use without distortion.

Auto changing pallet system allows over 2500kg loading weight.



OPTIMIZED BASE FRAME

- Very stiff and stable base frame
- Eight(8) zone & ducted exhaust system
- Dual synchronized twin servo motor drive system
- Helical rack & slant pinion drive system enables very smooth movements.



ULTRALIGHT-WEIGHT GANTRY STRUCTURE

- Light-weight cutting head assembly (Total weight 130 lbs) is designed for high dynamic movement, lowering the Tool Center Point to keep the cutting head from losing accuracy that is caused by whipping or drifting during high speed accell/decell movement


CAST ALUMINIUM GANTRY

- ACCURL®'s high tech aluminium cross beam is cast in a specially manufactured 10-tonne steel mould.
- This allows better rigidity at 50% of the weight of traditional iron gantries, allowing higher acceleration with reduced inertia.



YASKAWA SERVO MOTORS & DRIVES


- servo motors and drives from YASKAWA.
- High-speed EtherCAT communication
- Highly dynamic behaviour
- Brushless three-phase motors
- Flexible motor type selection

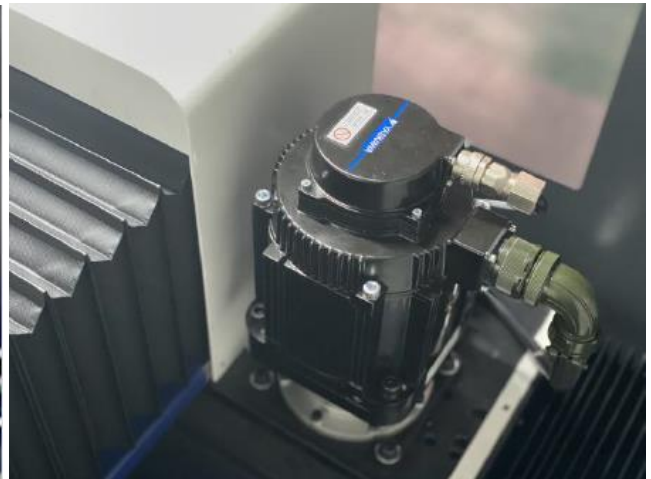




GRAPHITE ANTI-BURN TECHNOLOGY (OPTION)

- The area in the entire machine tool where the laser can shoot at is all covered and protected by 20mm thick graphite anti-bruning.
- To insuring the machine bed and working table not be out of shape and burned-out.

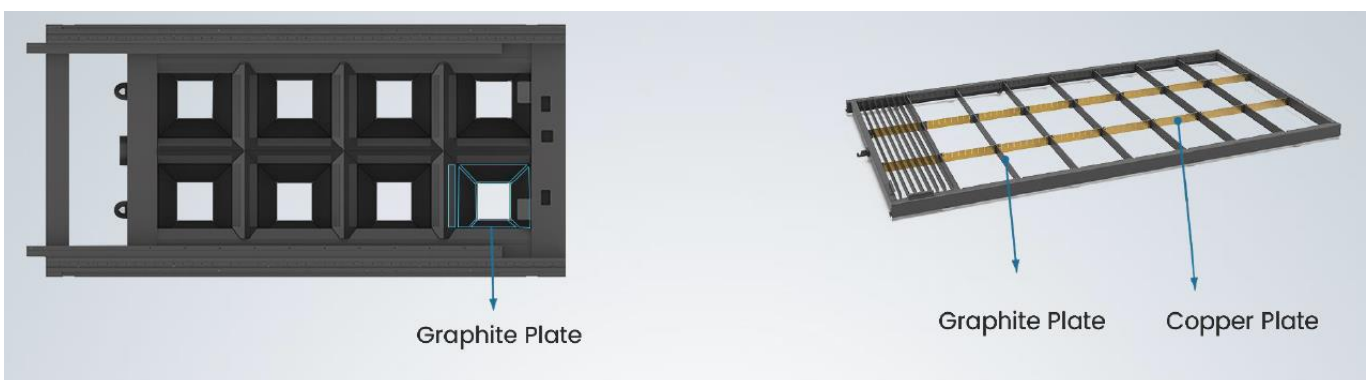

FUME EXTRACTION SYSTEM


- Efficient fume extraction by means of shutters which are controlled in accordance with cutting head position results in more efficient use of the filtration system.
- Therefore a smaller lower cost system can be used.the system consists of six fume extraction zones (as seen below).
- Smaller air flow from the dust collector
- Low electrical consumption

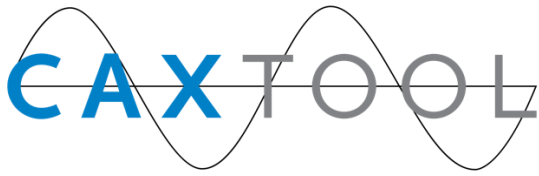

Caxtool Kft.
6791 Szeged, Dorozsmai út 157. EU
+36 62 254 826
+36 30 565 1812
d.zanocz@caxtool.hu
info@caxtool.hu


Adószám: 12871856-2-06
Adószám: HU 12871856
Bankszámla száma: 57600101-11102986
SWIFT (BIC): TAKBHUHB
IBAN: HU65 57600101 11102986 00000000
cégjegyzékszám: 06-09-014002
info:

- Smoke and dust free machining area

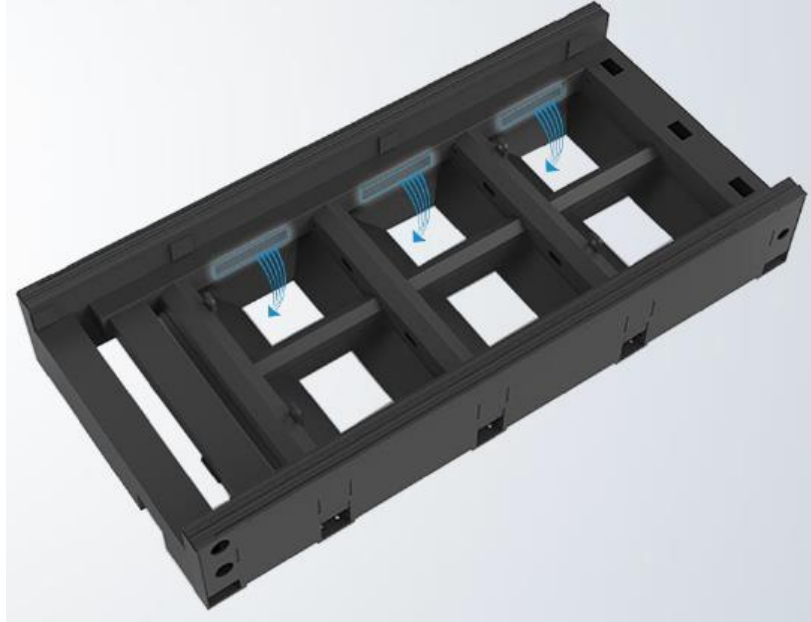


DUST EXTRACTION SYSTEM

- The fumes extraction or aspiration system for the treatment of vapors and fumes derived from laser cutting, consisting of:
- Filter plates with automatic compressed air cleaning cycle
- Integrated silencer
- Elimination of dust, particles and harmful fumes generated during cutting:
- Intelligent control by Siemens
- Self cleaning and Easy Disposal
- Free contacts for external control
- Integrated fan
- Dust load dependent automatic filter cleaning
- Siemens CPU and PTFE membrane filter cartridges
- This system is used to filter dry dust from industrial leaks, in accordance with VDI guidelines 3677, paragraph 4. The filter elements use compact porous filters.
- In many countries it is forbidden to circulate filtered air during the cutting of stainless steel (CrNi). Therefore, it is recommended that the user install air ducts to the outside.

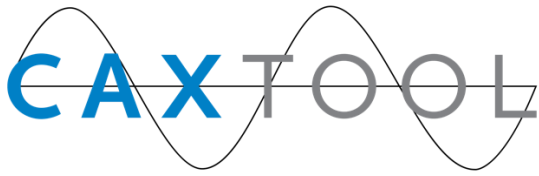


Caxtool Kft.
6791 Szeged, Dorozsmai út 157. EU
+36 62 254 826
+36 30 565 1812
d.zanocz@caxtool.hu
info@caxtool.hu


Adószám: 12871856-2-06
Adószám: HU 12871856
Bankszámla száma: 57600101-11102986
SWIFT (BIC): TAKBHUHB
IBAN: HU65 57600101 11102986 00000000
cégjegyzékszám: 06-09-014002
info:

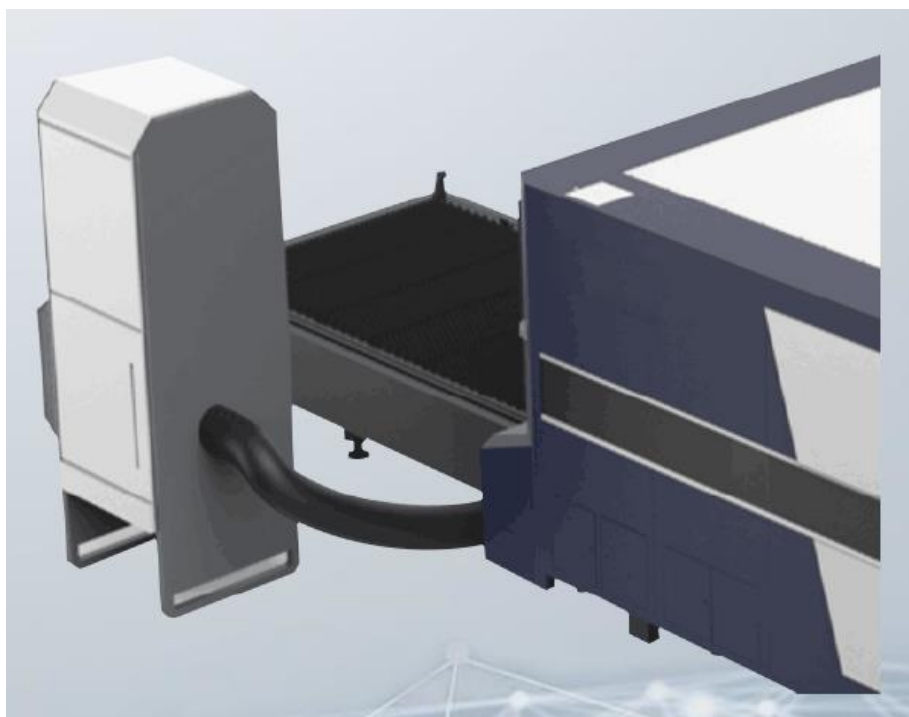

RayTools BM111 (Auto Focus) laser head

- The RAYTOOLS AG comes with the external motor and the built-in drive unit through the linear driver and the focusing lens can automatically change the position in the range of 25mm. The user can set the focus continuously through the program to complete the rapidperpiercing of thick sheets or other different thickness and material sheets.
- 35mm clear aperture, effectively reducing stray light interference, guarantee cutting quality and service life ;
- Motorized adjustment of lens position
- Anticollision system included
- Contains adjust box EG 8030, focal lens 200mm, glass protection, 3 nozzles.
- Cutting head contains collimator at 90° focal 100mm
- With a variety of optical interfaces, can be adapted with a variety of fiberlasers.
- Compact design
- Motorized protection windows
- Auto focus ranges +10~-12mm, accuracy is 0.05mm
- Drawer-type of lens mount, quick and easy access to the cover glass.
- Automatic adjustment of the focus and depth of the laser beam by "MZ -collimator module.

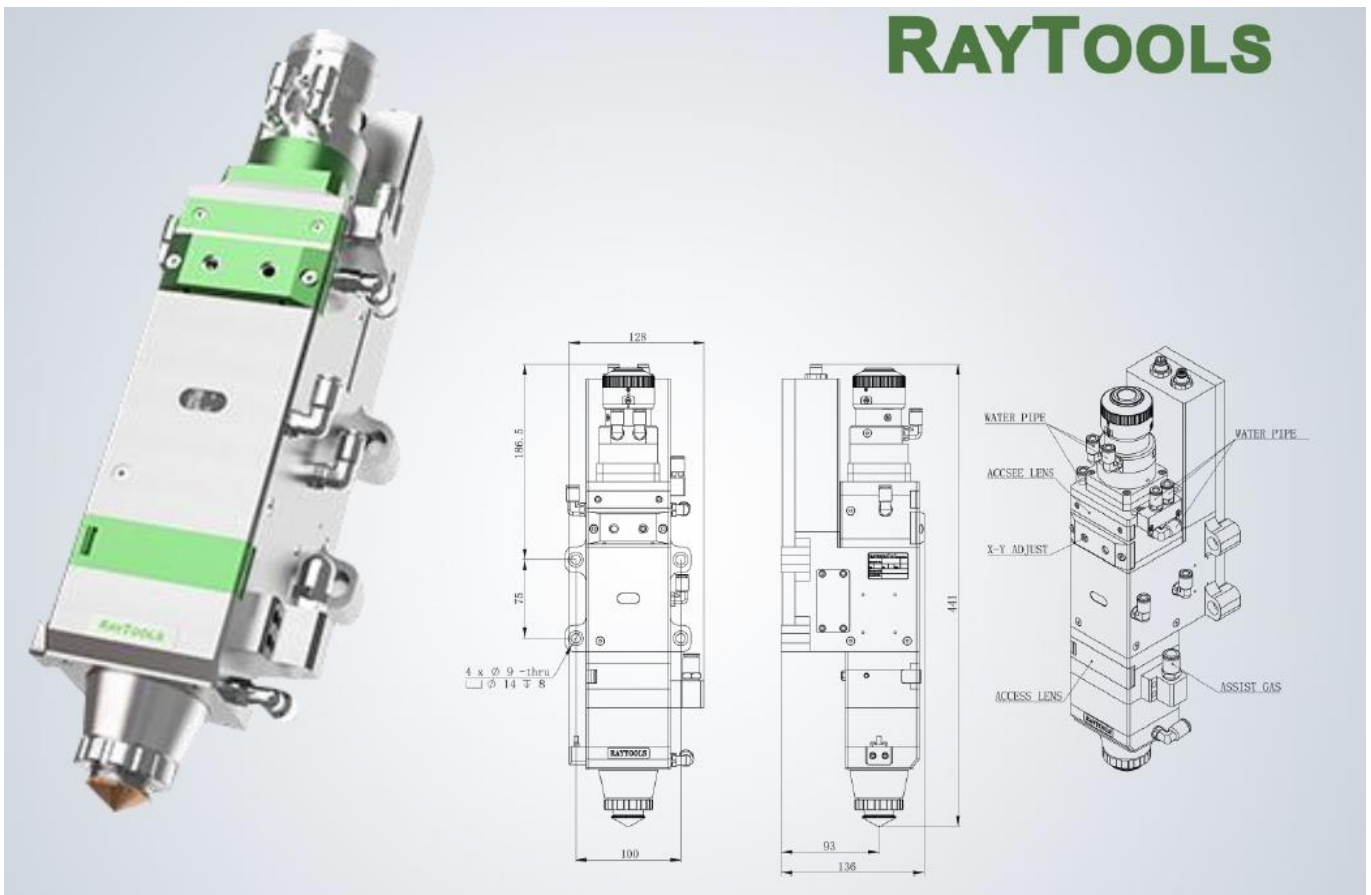

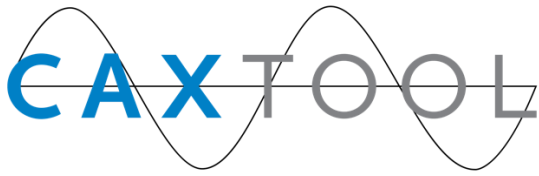

Caxtool Kft.
6791 Szeged, Dorozsmai út 157. EU
+36 62 254 826
+36 30 565 1812
d.zanocz@caxtool.hu
info@caxtool.hu

Adószám: 12871856-2-06
Adószám: HU 12871856
Bankszámla száma: 57600101-11102986
SWIFT (BIC): TAKBHUHB
IBAN: HU65 57600101 11102986 00000000
cégjegyzékszám: 06-09-014002
info:

FIBER LASER RESONATOR IPG

•The fiber laser resonator is a separate unit unattached to the cutting machine; this facilitates the design of laser cutters to deal with high speed cutting of thin materials and highquality cutting of thick materials. The unit contains the high stability resonator, kinetically suspended. The laser resonator includes a communication system featuring the control unit and a closed cooling circuit.


Features of the IPG equipment are as follows:.

- Direct control of all the fiber laser functions
- Synchronized control of the lasersource
- Overall power control
- High speed perforation
- Edge machining function
- Cutting data library
- High speed fiber laser cutting
- Wall-plug Efficiency >40%
- Cost-effective CuttingSystem
- Maintenance-free Operation
- Fiber Delivery 50, 100, 150or 200µm
- CW Output Power up to 20 kW @ Workpiece
- New fiber block design with 3x increase in damage power threshold, resulting in increasedreliability

LASER INTERFEROMETER:

ACCURL Using German imported laser interferometer measurement and adjusting the linear operation precision of the machine, to ensure the accuracy of mechanical structure reaches 0.01mm.



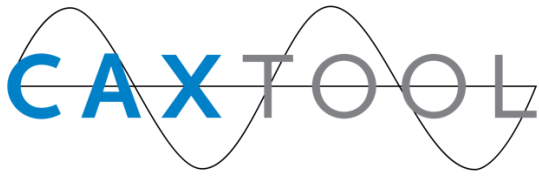


Caxtool Kft.
6791 Szeged, Dorozsmai út 157. EU
+36 62 254 826
+36 30 565 1812
d.zanocz@caxtool.hu
info@caxtool.hu


Adószám: 12871856-2-06
Adószám: HU 12871856
Bankszámla száma: 57600101-11102986
SWIFT (BIC): TAKBHUHB
IBAN: HU65 57600101 11102986 00000000
cégjegyzékszám: 06-09-014002
info:

- A Marble test is performed to measure the X and Y axis, calculating any necessary adjustments to ensure perfect level and alignment along length of machine.



- A collimator is run along the full length of the guide rail, testing for straightness. Adjustments are made as required to ensure linear accurate linear accuracy.

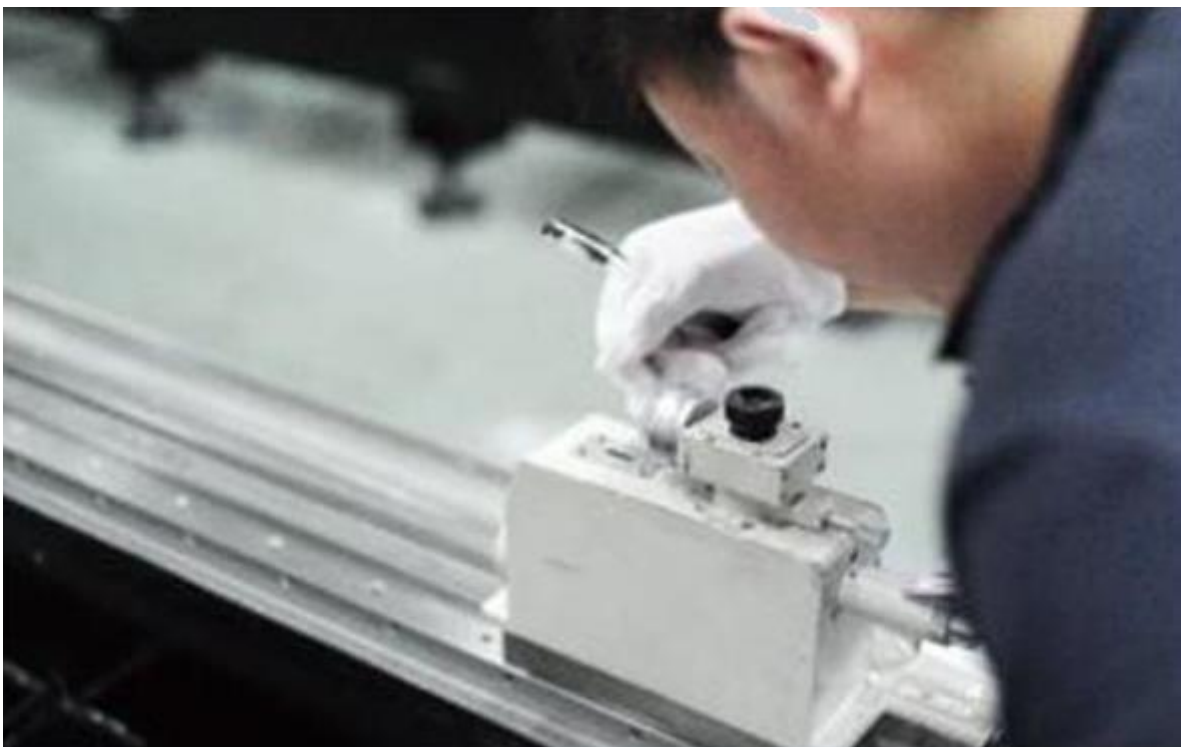

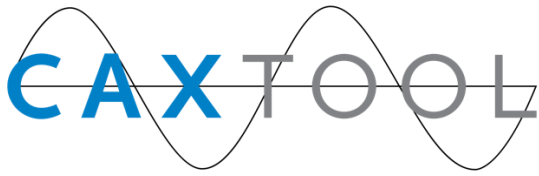

Caxtool Kft.
6791 Szeged, Dorozsmai út 157. EU
+36 62 254 826
+36 30 565 1812
d.zanocz@caxtool.hu
info@caxtool.hu

Adószám: 12871856-2-06
Adószám: HU 12871856
Bankszámla száma: 57600101-11102986
SWIFT (BIC): TAKBHUHB
IBAN: HU65 57600101 11102986 00000000
cégjegyzékszám: 06-09-014002
info:

Machine Application

Widely used in sheetmetal processing, aviation, aerospace, electronics, electrical appliances, automobile, food machinery, textile machinery, engineering machinery, precision parts, ships, metallurgy equipment, elevators, household appliances, craft gifts, tool processing, decoration, advertising, and other fields. Professional used to cut sheet metal like carbon/mildsteel, stainless steel, aluminum alloy, galvanized sheet, electrolytic plate, titanium alloy, aluminum zinc plate, etc.

